

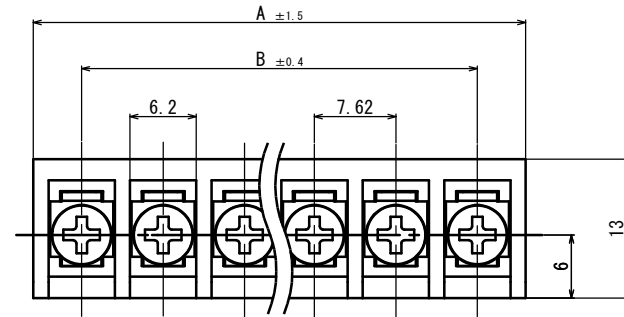


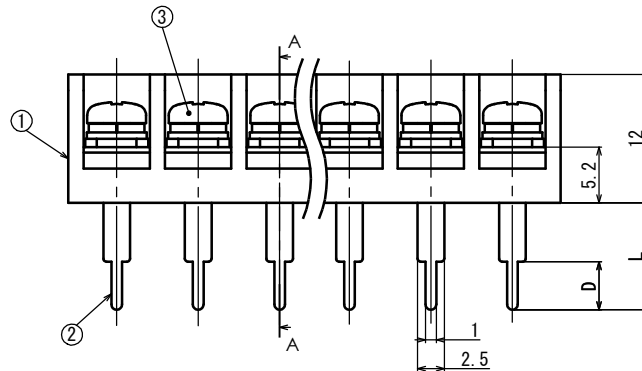


ピッチ／Pitch 7.62mm





型名 Type Number	F2068AX
定格 Rating	AC250V 10A
絶縁抵抗 Insulation Resistance	DC500V 1000MΩ以上 DC500V 1000MΩ and over
耐電圧 Withstands Voltage	AC2000V 1分間以上 AC2000V 1minute and over
ねじ径 Screw Diameter	M3
適合電線 Compatible Wire	0.75mm ²
推奨圧着端子 Recommended Crimp Terminal	RO.75-3

一般公差／General Tolerance ±0.5

尺度／Scale $\frac{1}{2}$ 単位／Unit mmA-A断面図
A-A Cross Section

4L時の形状

呼び／Nominal	L	D
4L	4	4
8.3L	8.3	4.5
10L	10	4.5
15L	15	4
38.5L	38.5	4
50L	50	4

S: リード外曲げ加工例
Example of a lead bent outwardU: リード内曲げ加工例
Example of a lead bent inward

(曲げ希望時)

- ・注文方法: [型名] --- [リード長] L --- [曲げ寸法] S/U --- [極数] P.
- ・Ordering Form: Type No. Lead Length(L) Bent Length(S or U) No. of Poles(P)
(if bending is desired)

- ・結線ビス: 締付けトルク 0.6N・m.
- ・Connection screw: Tightening torque is 0.6N・m.
- ・その他オプション: ショートピース (F2131, F2138)
- ・Other options: Jumper (F2131, F2138)

■仕様／Specifications.

部番/Part No.	部番/Part No.	材質/Material	規格/Standard	寸法/Size	処理/Treatment	備考/Remark
1	基板 Base	PBT	UL			黒色 Black
2	導電板 Terminal	黄銅 Brass	C2680R	板厚 t0.8	スズメッキ Tin-Plated	
3	結線ビス Screw	黄銅 Brass	C2700W	M3×0.5×5L	ニッケルメッキ Nickel-Plated	PW・SWに適合 Type⑤

極数/Poles	1P	2	3	4	5	6	7	8	9	10	11
A	10.0	17.6	25.2	32.9	40.5	48.1	55.8	63.4	71.0	78.6	86.2
B	-	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.20

極数/Poles	12P	13	14	15	16	17	18	19	20	21	22
A	93.9	101.5	109.1	116.7	124.3	132.0	139.5	147.2	154.8	162.4	170.1
B	83.82	91.44	99.06	106.68	114.30	121.92	129.54	137.15	144.78	152.40	160.02