
## 補強金具 **Fisc FUJICON**

Mounting Metal Fitting

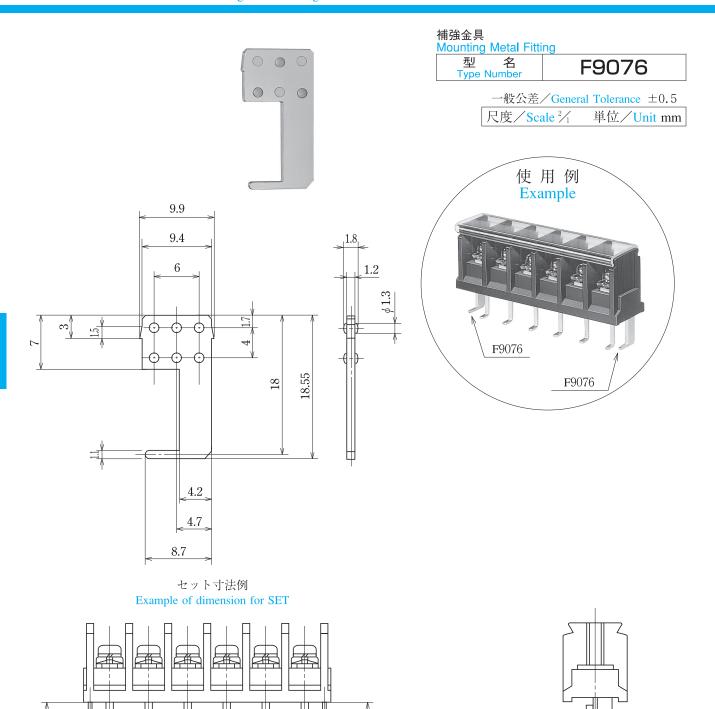

- 左右端リード中心より補強金具中心までの距離。
- Distance between center of lead at right and left end Printed board: t  $1.4 \sim 2.0$ and center of on the Mounting metal fitting.

2- ∮1.9 (プリント基板推奨穴径) (Printed board. recommended hole diameter)

プリント基板厚1.4~2.0

10

5.5

●注文方法:型名

10

• Ordering Form : Type No.

5.5

- ●注意:この補強金具はF2331AX、P-1X、UF2331AX、P-1X専用です。
- Note: This mounting metal fitting is exclusively for F2331AX, P-1X, UF2331AX and P-1X.

## ■仕様/Specifications

1-120	op comoditioner				
材	質/Material	規格/Standard	寸法/Size	処理/Treatment	備 考/Remark
黄	銅 Brass	C2680R	板 厚 t 1.2	スズメッキ Tin-Plated	