
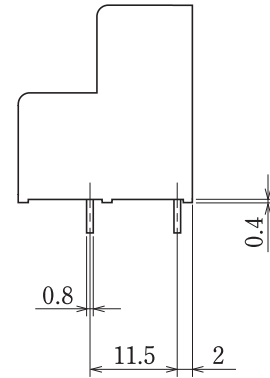
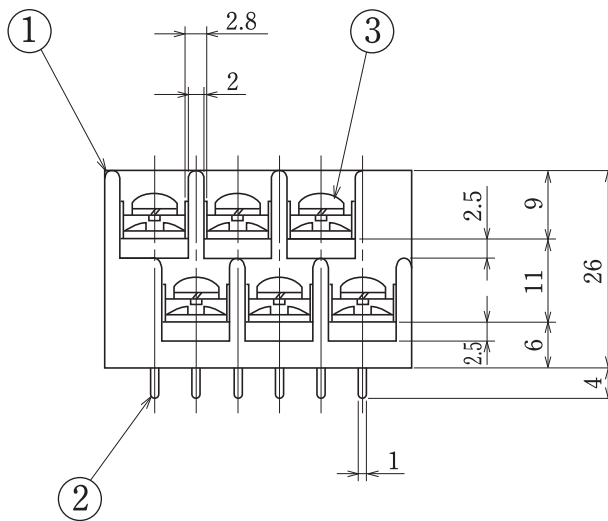


ピッチ/Pitch 11mm

型名 Type Number	UF2094A
定格 Rating	AC150V (AC250V) 15A (AC300V)
絶縁抵抗 Insulation Resistance	500V 1000MΩ 以上 DC500V 1000MΩ and over
耐電圧 Withstands Voltage	2000V 1 分間以上 AC2000V 1 minute and over
適合電線 Compatible Wire	12-22AWG
極数 Number or Poles	6 P

一般公差/General Tolerance ±0.5

尺度/Scale 1/1 単位/Unit mm

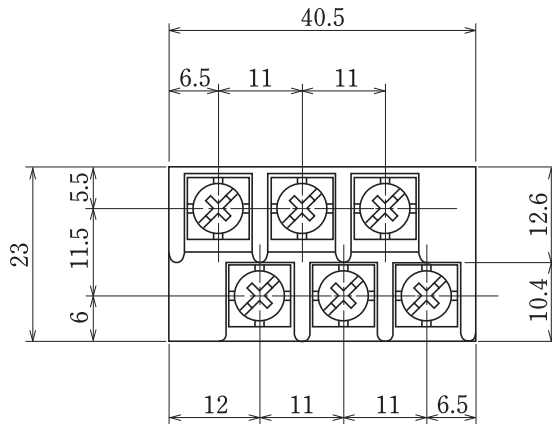

- 注文方法: 型名 ———— 6 P.
- Ordering Form: Type No. No. of Poles (P)
- 結線ビス: 締付トルクは1.0N・mです。
- Connection screw: Tightening torque is 1.0 N・m.
- 用途: 250V は市販(商業用)器具-事務用設備、電子式データ処理設備等  
150V は一般産業用。300V は工業用で制限された定格を持つ装置。
- Application: The 250V type is Commercial appliances, including business equipment, electronic data processing equipment, etc  
The 150V type is general industrial. The 300V type is industrial devices having limited ratings.

■仕様/Specification.

部番/Part No.	名称/Part Name	材質/Material	規格/Standard	寸法/Size	処理/Treatment	備考/Remark
1	基板 Base	PBT	UL			黒色 Black
2	導電板 Terminal	黄銅 Brass	C2680R	板厚 t 0.8	スズメッキ Tin-Plated	
3	結線ビス Screw	鉄 Steel	SWCH・SPCC	M3.5×0.6×8 ℓ	三価クロム Trivalent Chromate Treatment	フリータンシビス Type①

海外  
認定  
規格  
  
2  
段  
型