


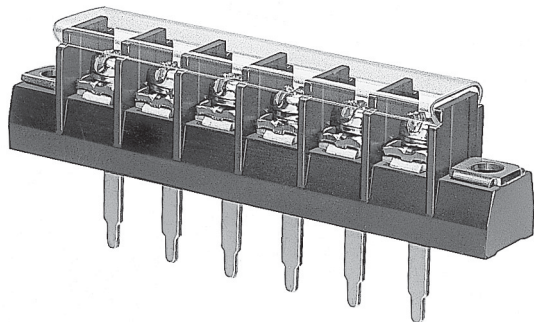


フィールドワイヤリング仕様

ピッチ/Pitch 10mm


型名 Type Number	UF2323ATI	
定格 Rating	AC250V 20A AC150V	
絶縁抵抗 Insulation Resistance	500V DC500V	1000MΩ 以上 1000MΩ and over
耐電圧 Withstands Voltage	2000V AC2000V	1 分以上 1 minute and over
適合電線 Compatible Wire	12-22AWG	

一般公差/General Tolerance ±0.5



尺度/Scale 1/1 単位/Unit mm

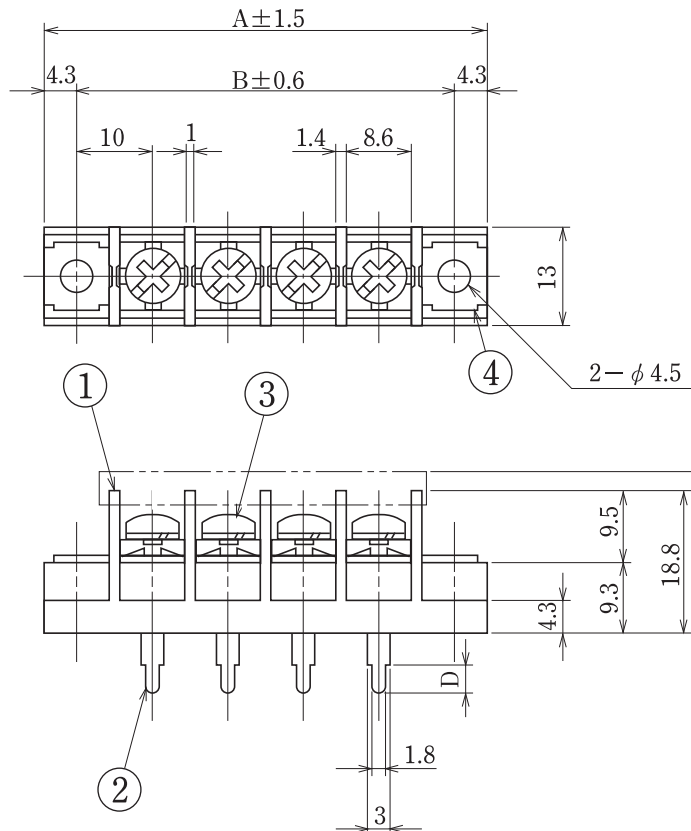

呼び/Nominal	L	D
4 L	4.2	4.2
8.6L	8.8	3.6
12L	12.2	3.6
14L	13.7	4
20L	20.2	3.6
28.5L	28.7	3.6
55L	55	10



リード曲げ加工例
Example of a lead bent

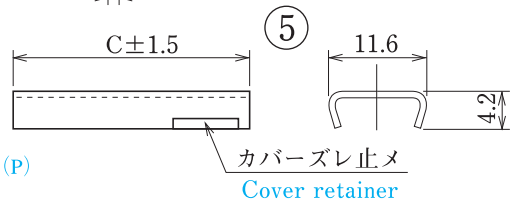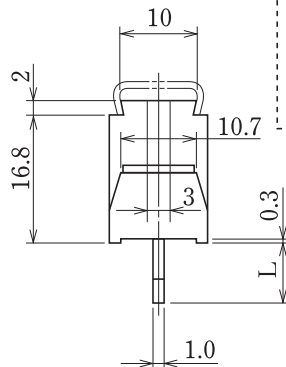

● 注文方法: 型名 — リード長 L — (曲げ希望時) 曲げ寸法 M — 極数 P.

● Ordering Form: Type No. Lead Length (L) Bent Length (M) No. of Poles (P)
(if bending is desired)

● 結線ビス: 締付トルクは1.4N・mです。又、別仕様についてはINDEXを御参照ください。

● Connection screw: Tightening torque is 1.4 N・m. See INDEX for other specifications.

● カバーはオプションとなっておりますので御希望の際は注文方法の末尾に—CTと御記入ください。但しカバーは添付納入となります。

● A cover is optional. To obtain one, add "—CT" to the end of the order description shown above. A cover will be delivered attached.

● 用途: 250V は市販(商業用)器具・事務用設備、電子式データ処理設備等。150V は一般産業用。フィールドワイヤリング(現場配線)。

● Application: The 250V type is commercial appliances, including business equipment, electronic data processing equipment, etc.

The 150V type is general industrial. Field Wiring.

仕様/Specification.

部番/Part No.	名称/Part Name	材質/Material	規格/Standard	寸法/Size	処理/Treatment	備考/Remark
1	基板 Base	PBT	UL			黒色 Black
2	導電板 Terminal	黄銅 Brass	C2680R	板厚 t 1.0	スズメッキ Tin-Plated	
3	結線ビス Screw	鉄 Steel	SWCH・SPCC	M4×0.7×8ℓ	ニッケルメッキ Nickel-Plated	フリータンシビス Type①
4	取付金具 Mounting plate	黄銅 Brass	C2680R	板厚 t 1.0	ニッケルメッキ Nickel-Plated	
5	カバー Cover	ポリカーボネート Polycarbonate	UL	板厚 t 0.8	透明 Transparence	オプション Optional

極数/Poles	1P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
A	28.6	38.6	48.6	58.6	68.6	78.6	88.6	98.6	108.6	118.6	128.6	138.6	148.6	158.6	168.6	178.6	188.6	198.6	208.6	218.6
B	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0	100.0	110.0	120.0	130.0	140.0	150.0	160.0	170.0	180.0	190.0	200.0	210.0
C	12.2	22.2	32.2	42.2	52.2	62.2	72.2	82.2	92.2	102.2	112.2	122.2	132.2	142.2	152.2	162.2	172.2	182.2	192.2	202.2