



ピッチ/Pitch 9.5mm

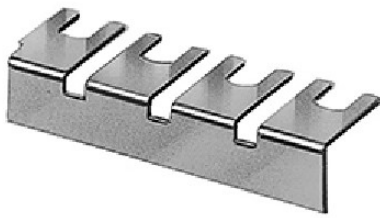

型名 Type Number	F2115L
定格 Rating	30A

一般公差/General Tolerance ±0.5

尺度/Scale 2/1 単位/Unit mm

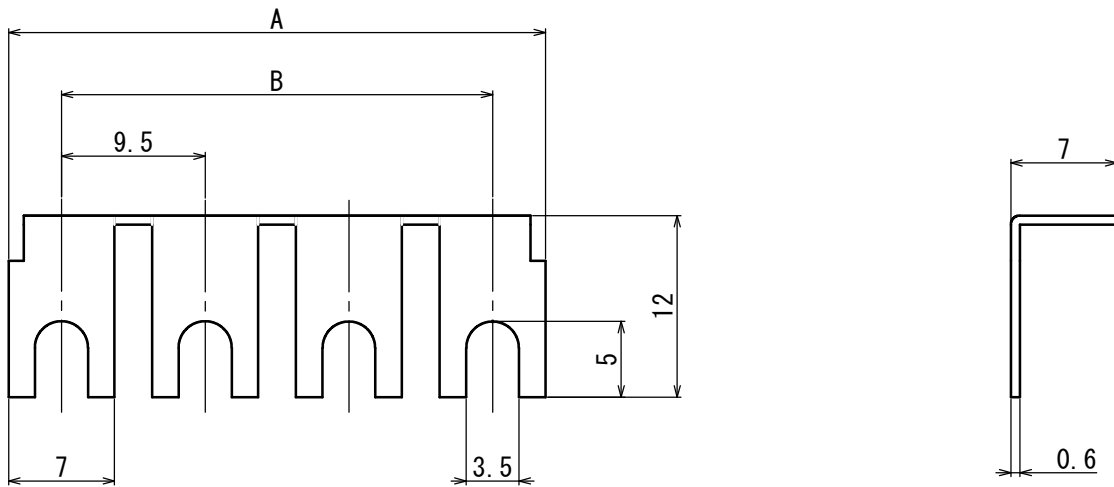

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	16.5	26	35.5	45	54.5	64	73.5	83	92.5	102	111.5	121	130.5	140	149.5
B	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133	142.5
在庫 Stock	○	○	—	—	○	—	—	—	—	—	—	—	—	—	—

○印：標準在庫

○Mark: Standard stock

—印：受注生産

—Mark: Production after receipt of order

●注文方法：型名 極数P.

●Ordering Form: Type No. No. of Poles(P)

・注文方法：型番-極数P. (下表の型番を御参照下さい。)

■仕様 Specifications. ・Ordering Form: Type No. (See the type number in the following table)

番号 Part No.	名称 Part Name	材質 Material	寸法 Size	規格 Standard	処理 Treatment
1	ショートピース Jumper	黄銅 Brass	板厚 t=0.6	C2680R	ニッケルメッキ Nickel-Plated
—	—	—	—	—	—

型番 Type No.	納入される物 Product Delivered
F2115L	フォーク型曲げショートピース Fork-type Bending Jumper
—	—